


DATOS TÉCNICOS  
TECHNICAL DATA

|                                        |                                                                  |
|----------------------------------------|------------------------------------------------------------------|
| Referencia de producto                 | 23042697                                                         |
| Product reference                      | 23042697                                                         |
| Descripción                            | Base múltiple con interruptor negro 4 tomas 1,5 metros con cable |
| Description                            | Base 4 sockets 16A with earth and switch black and 1.5m of cable |
| Peso neto (Kg)                         | 0.338                                                            |
| Net weight                             | 0.338                                                            |
| ETIM 9.0                               | EC000330                                                         |
| Intensidad (A)                         | 16A                                                              |
| IEC-Amperage (A)                       | 16A                                                              |
| Polos                                  | 2P+T                                                             |
| Poles                                  | 2P+T                                                             |
| Frecuencia                             | (50/60Hz)                                                        |
| Frequency                              | (50/60Hz)                                                        |
| Voltaje (V)                            | 250                                                              |
| Voltage (V)                            | 250                                                              |
| Color                                  | Negro                                                            |
| Colour                                 | Black                                                            |
| RAL                                    | -                                                                |
| Interruptor                            | Sí                                                               |
| Switch                                 | Yes                                                              |
| Material                               | PP                                                               |
| Material                               | PP                                                               |
| Grado de protección                    | IP20                                                             |
| Protection degree                      | IP20                                                             |
| Resistencia al impacto                 | IK08                                                             |
| Impact resistance                      | IK08                                                             |
| Uso                                    | Interior-Exterior                                                |
| Use                                    | Indoor-Outdoor                                                   |
| Prueba hilo incandescente              | 750°C soportes partes activas / 650°C otras part                 |
| Glow wire test                         | 750°C supports active parts / 650°C other parts                  |
| Ensayo de bola                         | 125°C soportes partes activas / 70°C otras parte                 |
| Ball pressure test                     | 125°C supports active parts / 70°C other parts                   |
| Resistencia al aislamiento             | >5MΩ@500Vdc                                                      |
| Insulating resistance                  | >5MΩ@500Vdc                                                      |
| Potencia max.                          | 3680                                                             |
| Max. power                             | 3680                                                             |
| Rigidez dieléctrica (kV)               | 2                                                                |
| Dielectric Strenght (kV)               | 2                                                                |
| Temperatura de funcionamiento          | -25°C/ 40°C                                                      |
| Operating temperature                  | -25°C/ 40°C                                                      |
| Temperatura de transporte y almacenaje | -25°C/ 70°C                                                      |
| Transport and storage temperature      | -25°C/ 70°C                                                      |
| Alto / High                            | 40                                                               |
| Ancho / Width                          | 225                                                              |
| Profundo / Deep                        | 47                                                               |

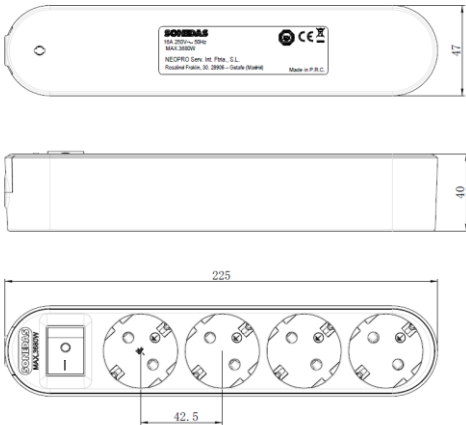

DATOS LOGÍSTICOS  
LOGISTICS

|                        |               |
|------------------------|---------------|
| Unidad mínima de venta | -             |
| Minimum sales unit     | -             |
| EAN Unitario           | 8422680140982 |
| EAN Unit               | 8422680140982 |
| Cantidad estuche       | -             |
| Quantity inner box     | -             |
| EAN Estuche            | -             |
| EAN Inner box          | -             |
| Cantidad caja          | 20            |
| Quantity master box    | 20            |
| EAN Caja               | 8422680141187 |
| EAN Master box         | 8422680141187 |
| Partida arancelaria    | 85366990      |
| HS code                | 85366990      |

NORMATIVAS Y CERTIFICACIONES  
APPLIED AND CERTIFICATIONS

|                         |                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------|
| Normativa               | UNE20315-1-1:2017, IEC 62368-1:2024/A11:2024, EN 62233:2008 ; IEC 61000-6-1:2019, IEC 61000-6-3:2021 |
| Applied                 | UNE20315-1-1:2017, IEC 62368-1:2024/A11:2024, EN 62233:2008 ; IEC 61000-6-1:2019, IEC 61000-6-3:2021 |
| Directiva baja tensión  | Low Voltage Directive 2014/35/UE                                                                     |
| Low Voltage Directive   | Low Voltage Directive 2014/35/UE                                                                     |
| Directiva Rohs          | RoHS 2011/65/UE and modifications                                                                    |
| Rohs Directive          | RoHS 2011/65/UE and modifications                                                                    |
| Certificado de producto | TUV SUD                                                                                              |
| Product certificate     | TUV SUD                                                                                              |